


Mega Egress Friction Stay



- Opening angle to 90°
- Head of the hinge is held fast providing greater weather resistance and high security
- Superior internal strength – maximum 40kg load
- Easy Clean feature auto locks back into egress mode
- Two sizes suit windows up to 900mm wide
- Stainless steel construction

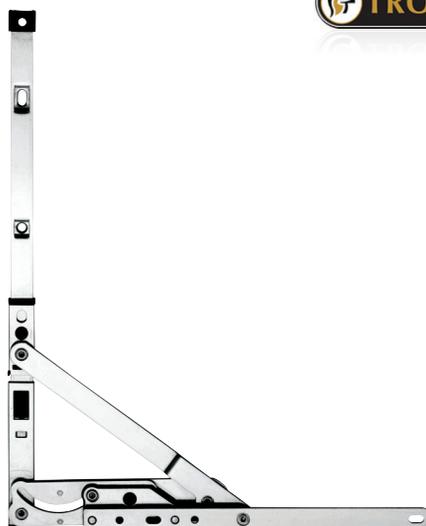

The Mega Egress Hinge is designed for use on casement window systems and is suitable for most side hung applications. Due to the superior integral strength, the hinge can be used for all sash widths up to 900mm with a maximum load of 40kg.

This hinge helps windows to meet fire escape regulations, allowing the sash to open a full 90° from the corner of the frame.

The Easy Clean feature on the Mega Egress hinge allows the sash to slide away from the corner and then auto lock back into egress mode for safety. Carl F Groupco recommend, for safety reasons, that an immobiliser be fitted to the Easy Clean feature on sash widths above 600mm (please see fitting instructions for more information).

When closed, the head of the hinge is held fast to provide greater weather resistance and high security. Manufactured from stainless steel the Mega Egress Hinge also boasts high corrosion resistance, tested to BS EN 1670.

Testing and Accreditation:

- Tested to BS EN 1670 in a UKAS laboratory, exceeding grade 5 classification for ultimate corrosion resistance
- Tested over 25,000 cycles with 40kg operational load
- Tested to the equivalent of PAS 24 for security with 3Kn perpendicular load and 1kg lateral load
- BBA accreditation certificate number: S2-41921

Stack Height		Hinge Length (mm)	Max Weight (kg)	Max Frame Width (mm)	Opening Angle (+/- 2.5°)	Box Qty
13.5mm	16.5mm					
Mega Egress Friction Stay						
0115-2013-E-135	0115-2013-E-165	13"	40	900	90	25
0115-2008-E-135	0115-2008-E-165	8"	33	600	90	25

NB: 8" = Fixed egress, non-easy clean.