

# Kenrick Excalibur Door Lock



- Serrations to allow for shootbolt extensions
- Up to 4mm of compression on rollers
- Dual spindle gearbox
- One piece keeps are supplied as standard

The Excalibur multipoint door lock, manufactured by Kenrick, was designed to meet the most rigorous standards for residential security.

Three hooks and two steel anti-lift bolts provide security. Smooth operation and compression is ensured by three roller cams, one positioned directly underneath the main gearbox.


The three hook lock covers a multitude of options and every lock in the range can be matched with top and bottom shootbolts to provide more security.

The Excalibur gearbox is sprung as standard for both lever/lever and lever/moving pad (dual follower) operation.

#### Technical Information:

- Faceplate: 16mm x 3mm
- Backset: 35mm
- PZ centre: 92 or 92/62mm
- Spindle size: 8mm
- Clearance required behind backset: 53mm
- Throw:**
  - Centre hook: 22mm
  - End hook: 25mm
  - Anti-lift bolts: 15mm
  - Roller cam travel: 20mm

Description	Part Code	Box Qty
<b>Kenrick Excalibur 62/92mm PZ</b>		
3 Hook, 2 Anti-Lift Bolt, 3 Roller	EXDL33	5
<b>Kenrick Excalibur 92mm PZ</b>		
3 Hook, 2 Anti-Lift Bolt, 3 Roller	EXDL33SBP	5
<b>Kenrick Excalibur 92mm PZ Split Spindle</b>		
3 Hook, 2 Anti-Lift Bolt, 3 Roller	EXDL33SS	5
<b>Shootbolt Extensions Spindle</b>		
Top & Bottom Set	EXDSBK	10

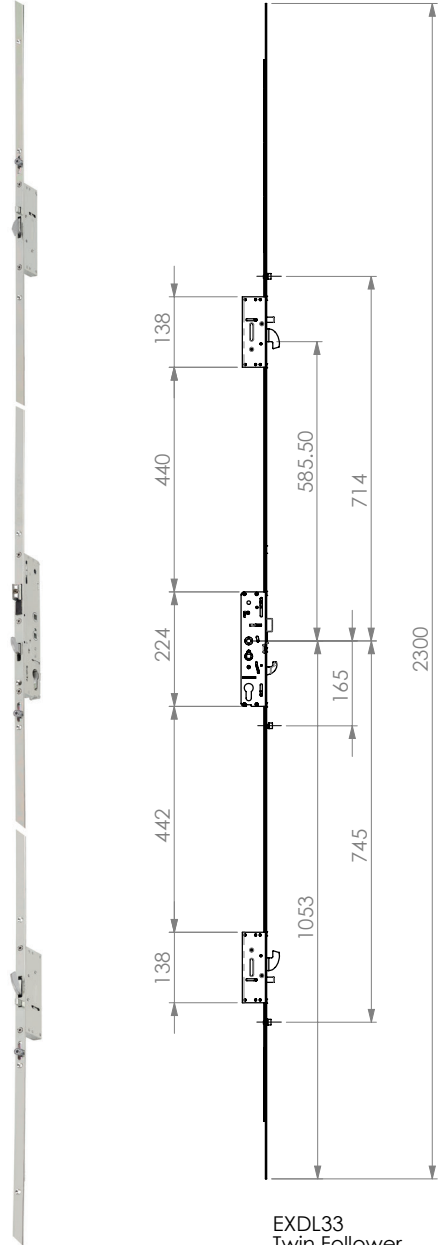

EXDL33  
Twin Follower