

Cotswold Egress Friction Stay




- Side hung friction stays
- Full clear opening in excess of 540mm (W) x 750mm (H)

The Cotswold Egress only friction stay is available as side hung only.

The 10" Egress friction stay is ideal for use on French casement windows where smaller sashes are required with wide opening angles to allow for escape.

When fitted, the Cotswold Egress friction stay complies with the emergency exit egress requirements of Approved Document B1 of building regulations.

When fitting the Cotswold Egress stays please observe BS 8213 Part 1:2004 Code of practice for safety in use and during cleaning of windows.

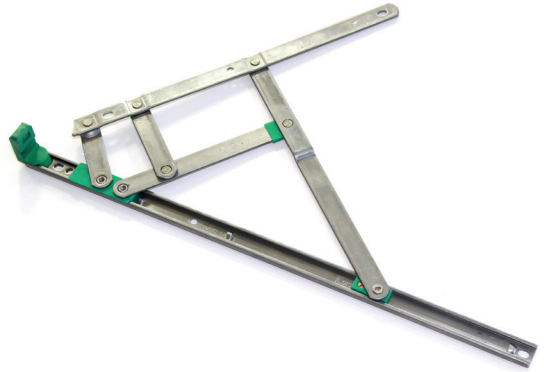

Technical Information:

Material Specification:

- Ferretic steel suitable for normal applications supplied as standard
- Austenitic steel suitable for coastal/high humidity areas available to special order

Sizes:

- Available in 10" and 16" Side hung
- Available in 13mm or 17mm Stack Heights

Part Code	Size (")	Size (mm)	Application	Max.Window Width (mm)	Max.Window Height (mm)	Max.Window Weight (kg)	Stack Height (mm)	Opening Angle	Box Qty (Pairs)
Cotswold Egress Friction Stay									
SP254**	10	254	Side Hung	600	1200	18	13 & 17	80°	25
SP316**	16	406	Side Hung	600	1200	21	13 & 17	84°	25

**Insert stack height required, i.e. for 17mm stack height 10" side hung: SP25417. Please note all sizes and weights are approximate.