

Cotswold Extreme Heavy Duty Egress Easy Clean Friction Stay




- Suitable for heavy duty applications up to 35kg
- Full opening can provide clear egress
- Simple thumb catch operation to easy clean mode
- Manufactured in the UK

The Extreme Egress Easy Clean friction stay is suitable for use in heavy duty applications. The Extreme variant features 2 reinforced austenitic heavy duty links to add strength.

The friction stays full opening provides clear egress in excess of 500mm on a 600mm wide vent.

The easy to operate thumb catches allow the vent to slide to the Easy Clean position giving between 100mm and 250mm clear opening.

To reset back to Egress only mode, simply close the window, then re-open to go back to the egress position and close. When fitted the Cotswold Egress frictions stay complies with the emergency exit egress requirements of Approved Document B of building regulations.

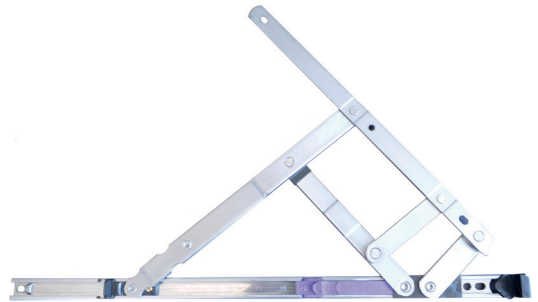

Technical Information:

Material Specification:

- Ferretic steel suitable for normal applications supplied as standard
- Austenitic steel suitable for coastal/high humidity areas available to special order

Sizes:

- Available in 12" and 16" side hung
- Available in 13mm or 17mm stack heights

| Part Code | Size (") | Size (mm) | Application | Max. Window Height (mm) | Max. Window Width (mm) | Max. Window Weight (kg) | Stack Height (mm) | Opening Angle | Box Qty (Pairs) |
|--|----------|-----------|-------------|-------------------------|------------------------|-------------------------|-------------------|---------------|-----------------|
| Cotswold Extreme Heavy Duty Egress Easy Clean Friction Stay | | | | | | | | | |
| SP312EZEXT** | 12 | 311 | Side Hung | 1200 | 700 | 30 | 13 & 17 | 85° | 50 |
| SP316EZEXT** | 16 | 406 | Side Hung | 1200 | 800 | 35 | 13 & 17 | 89° | 25 |

**Insert stack height required, i.e. for 17mm stack height 12" side hung: SP3112EZEXT17.
Please note that sizes and weights are approximate.